


■ Bi-level Microwave Sensor For High Bay Light M001644 Instruction



M001644



RC-100

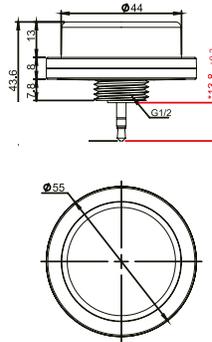

INTRODUCTION

The **M001644** is a motion sensor that dims lighting from high to low based on movement. This slim, low-profile sensor is designed for installation inside the bottom of a light fixture body.

The sensors use microwave sensing technology that reacts to changes in movement within the coverage area. Once the sensor stops detecting movement and the time delay elapses lights will go from high to low mode and eventually to an OFF position if it is desired. Sensors must directly “see” motion of a person or moving object to detect them, so careful consideration must be given to sensor luminaire placement and lens selection. Avoid placing the sensor where obstructions may block the sensor’s line of sight.

SPECIFICATIONS

Power supply	12V–24V DC, >50mA
Dim control output	0-10V, max. 25mA sinking current
HF System	5.8GHz±75MHz
Transmission power	<0.2mW
Detection radius	20%/50%/75%/100%(1-8m)
Mounting height	Max 40ft.(12meters)
Time setting	10s/1min/5min/10min/15min/20min/30min/60min
Light-control	24H/10LUX/30LUX/50LUX
Temperature	-4°F ~ +140°F (-20°C ~ +60°C)
IP rating	IP65

⚠ WARNING

NOTE: Warm up time is 15seconds. After the sensor connects input power first time, the light will keep on 15seconds, then go to dimming to work normally.

NOTE: Factory Default Setting: 100% sensitivity, Hold on time: 5min, Daylight sensor is ☀, Dimming level:30%, Dimming time: 30minitues.

NOTE: Any setting changed by remote control, the led light that sensor connect will on/off as confirm.

CORRIDOR FUNCTION

This function inside the motion sensor to achieve tri-level control, for some areas which require a light change notice before switch-off. The sensor offers 3 levels of light: 100%-->dimmed light (natural light is insufficient) -->off; and 2 periods of selectable waiting time: motion hold-time and stand-by period; Selectable daylight threshold and freedom of detection area.



With sufficient natural light, the light does not switch on when presence is detected.



With insufficient natural light, the sensor switches on the light automatically when presence is detected.



After hold-time, the light dims to stand-by level if the surrounding natural light is below the daylight threshold.



Light switches off automatically after the stand-by period elapses.


■ Bi-level Microwave Sensor For High Bay Light M001644 Instruction

DAYLIGHT SENSOR FUNCTION


Open the daylight sensor by push (II) when remote control is in setting condition.



The light switches on at 100% when there is movement detected.



The light dims to stand-by level after the hold-time.



The light remains in dimming level at night.

Settings on this demonstration:

Hold-time: 30min


Setpoint on: 50lux

Setpoint off: 300lux


Stand-by Dim: 10%

Stand-by period: +∞


(when the smart photocell sensor open, the stand-by time is only +∞)




1 → 3 goes in cycle at night...
100% on when movement detected, and dims to 10% in long absence.




When the natural light level exceeds setpoint off to light, the light will turn off even if when the space is occupied.



The light automatically turns on at 10% when natural light is insufficient (no motion).

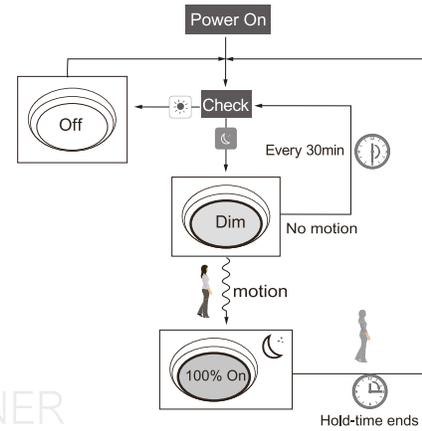

SENSOR COVERAGE

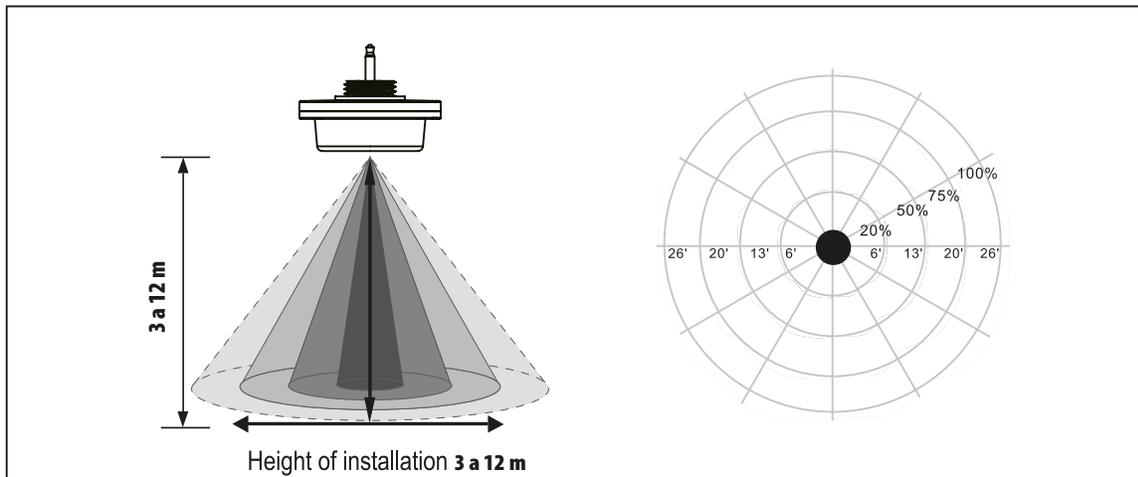

ILLUMINER
SOLUCIONES EN ILUMINACION

BI-LEVEL DIMMING M001644

INSTALL INSTRUCTIONS

PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the luminaire.
WARNING, CAUTIONS AND OPERATING INSTRUCTIONS

To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.

Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.

If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.

Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.


- Turn off electrical power at fuse or circuit breaker box before installation or performing any maintenance.

Avoid direct eye exposure to the light source while it is on.


Do not use with POWER-SELECT™ HIGH BAYS, with an installed sensor socket.

! WARNING DISCONNECT POWER BEFORE INSTALLING OR SERVICING.


SENSOR INSTALLATION

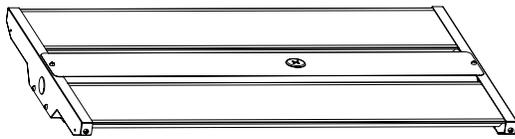


1. Note: a sensor affects the whole fixture.

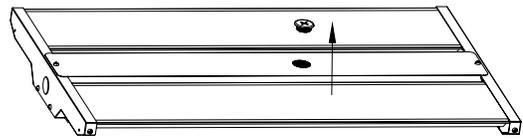


2. Remove sensor socket cover.

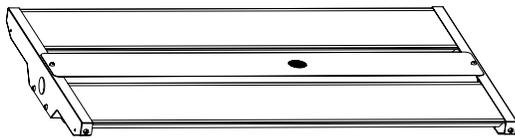


3. Expose sensor socket.

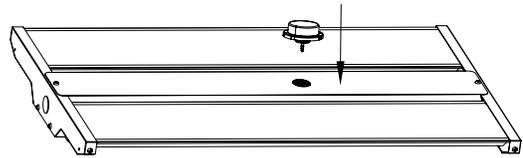

4. Plug in sensor.

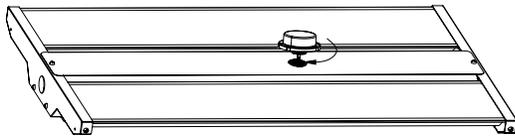


5. Turn clockwise to fasten sensor to the socket.

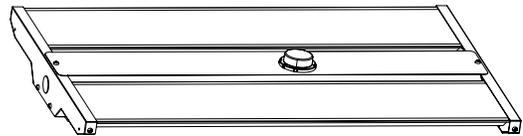

6. Installation complete, see sensor operating instructions.



GENERAL WIRING DIAGRAM

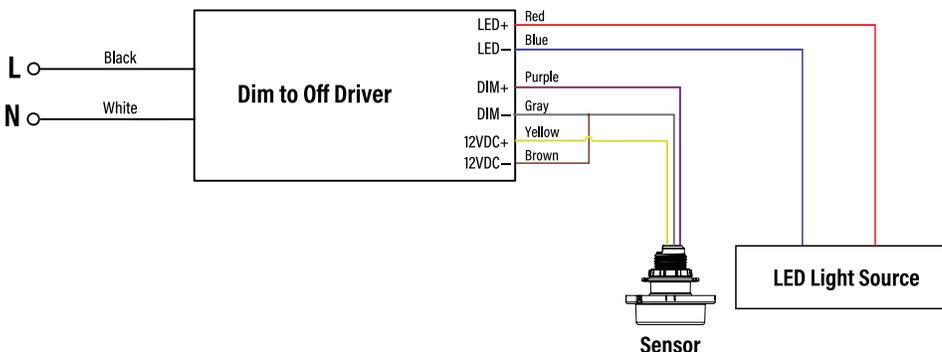

SENSOR DEFAULT SETTINGS

Trim Level: 100%
 Sensitivity: High
 Hold Time: 5 min.
 Stand-by Dim: 50%
 Stand-by Time: 30 min.
 Photocell: Off