


Channel Letter

LED Lighting System

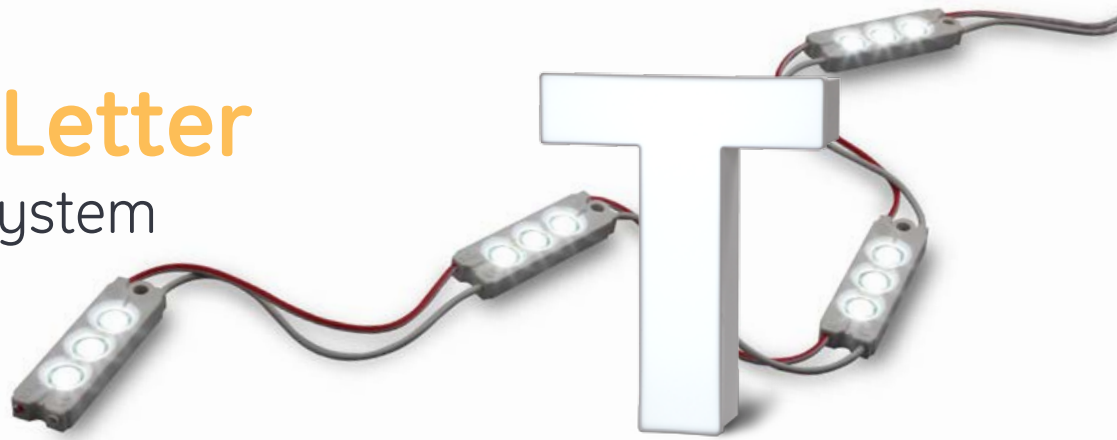

Technical Specifications

SKU:	93031951	93031952	93031953	93038627
Description:	1111-WH-04-3	1111-RD-04-3	1111-WH-04-H1	1111-WH-45-H1
Long Description:	White (6500K) 3 LED Module	Red 3 LED Module	White (6500K) High Output 3 LED Module	White (6500K) Super High Output 3 LED Module
Lumen/Module	50	11	72	72
Lumen/ft.	100	22	144	190
Wavelength/CCT	6500K	625nm	6500K	6500K
Input voltage(DC)	12V	12V	12V	12V
Power(W)/Module	0.5	0.372	0.9	0.96
Power(W)/ft.	1.2	0.744	1.8	2.4
LEDs/Module	3	3	3	3
Power Supply Loading (60W)	120 Modules/60 ft.	120 Modules/60 ft.	72 Modules/36 ft.	70 Modules/28 ft.
Dimensions (mm) (LxWxH)	48 x 19.75 x 9			
IP Rating	IP66 with separate enclosure required, Damp rated			
Packaging information	200 ft. / box		250 ft. / box	
Warranty Life	5 Years			
System Certification	UL Recognized #E219167, UL Classified #E229508, CE, and RoHS compliant			

Specification Item

Specification



Cutting Resolution	Cut on wire between every module			
Power Supply	GEPS1111-PS-60 Input: 100-240VAC; Input Frequency: 50/60 Hz; Output: 12VDC			
Maximum Supply Wire Limits	18 AWH/0.82 mm²	18 AWH/0.82 mm²	18 AWH/0.82 mm²	18 AWH/0.82 mm²
60W Power Supply:	Supply Wire 20 ft. (6.1 m)	Supply Wire 30 ft. (9.1 m)	Supply Wire 50 ft. (15.2 m)	Supply Wire 86 ft. (26.2 m)
Operating Environment	-40 °C to +60 °C			
Module Dimensions (h x w x l)	7.31 x 52.9 x 15 in.			
Warranty	GE offers a limited system warranty of up to five (5) years			
System Certifications	IP66 rated: For Dry, Damp locations			



www.currentbyge.com

All trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. Current, powered by GE is a business of the General Electric Company.
© 2016 GE.

ABCD123 (Rev 08/03/16)