

GE
Lighting

Tetra[®] miniMAX

LED Lighting System

Wet or dry—our **brightest** solution
for **small** channel letters



imagination at work

Tetra® miniMAX

Maximized Output. Minimized Expense.

Tetra® miniMAX—the remarkable LED system designed for small channel letters as shallow as 1.5 inches in depth delivers incredibly uniform light, installs easily and operates efficiently. The **Tetra® miniMAX** is now IP66 and UL wet rated which makes it more robust and reliable even under wet weather.

Working closely with sign builders and owners, we've refined our design to improve performance while decreasing the amount of product required, further reducing installation and material costs.




Powerful OptiLens™

Tetra® miniMAX features **OptiLens™** a patented technology that captures otherwise wasted light and redirects it towards the illuminated surface with impressive uniformity. It optimizes each LED—which enables wider stroke spacing—reducing the amount of material needed per sign while helping protect the LED against moisture, humidity, damage and corrosion.

Tetra® miniMAX Wet Location Rated

Now there's a miniMAX solution for **wet locations** where saturation with water or other liquids is likely. Integrating all the same performance features of miniMAX, the miniMax wet rated is IP66 and UL wet rated. It contains an added over molded design that protects against water ingress, dust and damage, and a special module top surface to eliminate water retention —no separate enclosure is required.

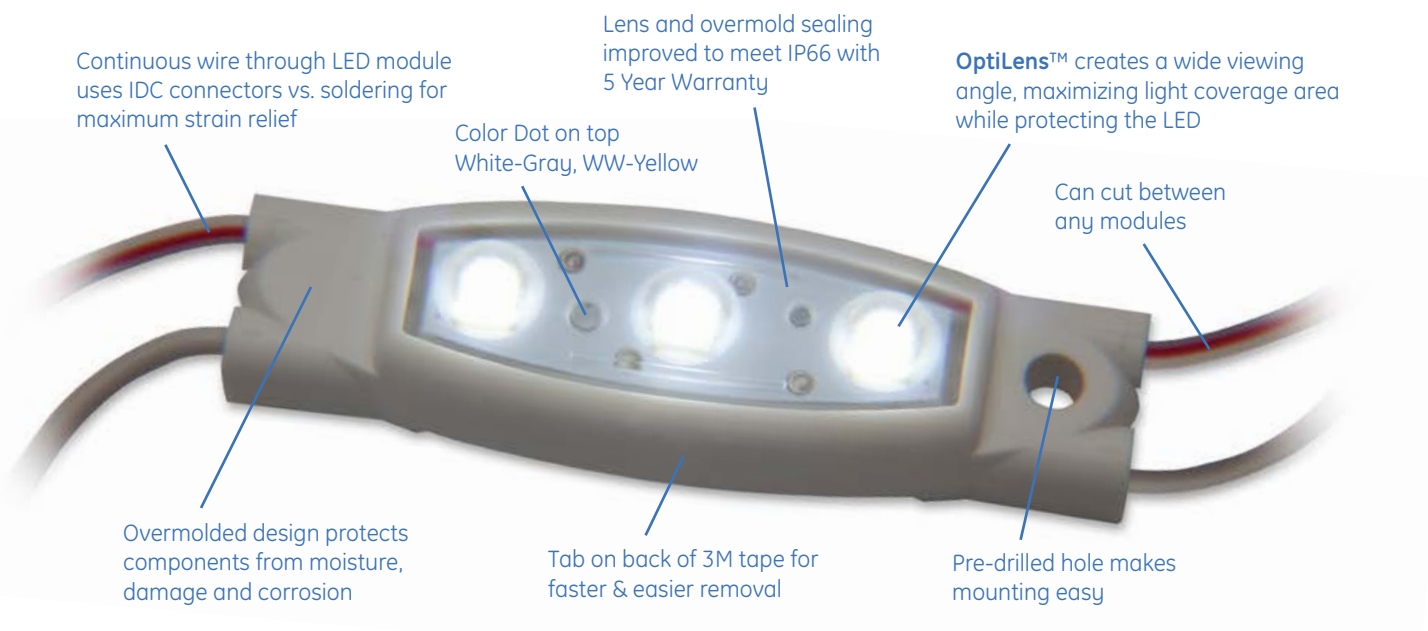



a product of
ecomagination™

Can cut product required almost in half

Many LED systems use about 13 LED modules in 2 rows to fill a capitol "T" channel letter that's 2 feet high.

Use one row, not two. Tetra® miniMAX stretches stroke spacing to an impressive 7 inches in a 3-inch depth channel while maintaining impressive light uniformity on the sign face. It protects your customers' brand image while reducing product costs and saving you installation time.

Total GE Reliability

To ensure every Tetra® miniMAX installation will operate brilliantly for years, we perform the most extensive, stringent testing in the industry. Rather than relying solely on test data from LED suppliers, we test the LED, water and dust ingress protection, sub-system and complete system at our in-house and independent laboratories around the world. Validation of our designs, components, products and processes include high-temperature, high-humidity and accelerated life testing.

Components

| SKU | Description | Package Quantity |
|-----------|---|------------------------------------|
| GEMM71-W1 | Tetra miniMAX 7100K | 100 ft (30.48 m)/box (250 modules) |
| GEMM50-W1 | Tetra miniMAX 5000K | 100 ft (30.48 m)/box (250 modules) |
| GEMM41-W1 | Tetra miniMAX 4100K | 100 ft (30.48 m)/box (250 modules) |
| GEMM32-W1 | Tetra miniMAX 3200K | 100 ft (30.48 m)/box (250 modules) |
| GEMMRD-W1 | Tetra miniMAX Red | 100 ft (30.48 m)/box (250 modules) |
| GEMMBL-W1 | Tetra miniMAX Blue | 100 ft (30.48 m)/box (250 modules) |
| GEMMGL-W1 | Tetra miniMAX Green | 100 ft (30.48 m)/box (250 modules) |
| GEMMPO-W1 | Tetra miniMAX Orange | 100 ft (30.48 m)/box (250 modules) |
| 9409 | 18 AWG Supply Wire (0.82 mm ²) | 500 ft /spool (152.4 m) |
| 191600041 | 22-14 AWG Twist-On Wire Connectors (0.33 - 2.08 mm ²) | 500/ PK |
| 192160004 | 18-14 AWG In-line Connectors (IDC) (0.82-2.08 mm ²) | 500/ PK |

Technical Specifications

| Color | Wavelength | Typical Brightness (lumens/module) | Typical Brightness (lumens/ft.) | Energy Consumption (Strip/Module) | Energy Consumption (System/Module) | Power Supply Loading | Viewing Angle |
|--------------------------|--------------|------------------------------------|---------------------------------|-----------------------------------|------------------------------------|----------------------|---------------|
| Tetra miniMAX White | 7100K, 5000K | 36 | 90 | 0.32 | 0.38 | 68ft (170 modules) | 150 |
| Tetra miniMAX Warm White | 4100K, 3200K | 34, 30 | 85, 75 | 0.32 | 0.38 | 68ft (170 modules) | 150 |
| Tetra miniMAX Red | 625nm | 11 | 27 | 0.39 | 0.47 | 60ft. (150 modules) | 150 |
| Tetra miniMAX Blue | 467nm | 8 | 19 | 0.39 | 0.47 | 60ft. (150 modules) | 150 |
| Tetra miniMAX Green | 530nm | 24 | 60 | 0.39 | 0.47 | 60ft. (150 modules) | 150 |
| Tetra miniMAX Orange | 606nm | 19 | 48 | 0.48 | 0.59 | 60ft. (150 modules) | 150 |

| Specification Item | Specification | | | | | | | | | | | | | | | |
|-------------------------------|---|--|-----|-------------------|----------------|------------------|--|----------------|--|---------------------------------------|-----------------|--|---------------------------------------|-----------------|--|---------------------------------------|
| LEDs/ Module | 3 | | | | | | | | | | | | | | | |
| Module/ft. | 2.5 | | | | | | | | | | | | | | | |
| Cutting Resolution | Cut on wire between every module | | | | | | | | | | | | | | | |
| Power Supply | GEPS12-25U-NA Input: 90-264VAC; Output: 12VDC GEPS12-60U-NA Input: 108-305VAC; Output: 12VDC GEPS12-60-GL Input: 108-305VAC; Output: 12VDC GEPS12W-60 Input: 90-264VAC; Output: 12VDC GEPS12D-60U Input: 90-305VAC; Output: 12VDC GEPS12-180U-NA Input: 90-305VAC; Output: 12VDC | | | | | | | | | | | | | | | |
| Maximum Supply Wire Limits | <table border="1"> <thead> <tr> <th>60W, 80W, 100W, 180W</th> <th>25W</th> <th>Supply Wire Gauge</th> </tr> </thead> <tbody> <tr> <td>20 ft. (6.1 m)</td> <td>120 ft. (36.6 m)</td> <td>18AWG/0.82mm² supply wire - 9409</td> </tr> <tr> <td>25 ft. (7.6 m)</td> <td></td> <td>16AWG/1.31mm² supply wire</td> </tr> <tr> <td>35 ft. (10.6 m)</td> <td></td> <td>14AWG/2.08mm² supply wire</td> </tr> <tr> <td>40 ft. (12.1 m)</td> <td></td> <td>12AWG/3.31mm² supply wire</td> </tr> </tbody> </table> <p>Wiring to be installed in accordance with Article 725 of the National Electric code (NEC).</p> | 60W, 80W, 100W, 180W | 25W | Supply Wire Gauge | 20 ft. (6.1 m) | 120 ft. (36.6 m) | 18AWG/0.82mm ² supply wire - 9409 | 25 ft. (7.6 m) | | 16AWG/1.31mm ² supply wire | 35 ft. (10.6 m) | | 14AWG/2.08mm ² supply wire | 40 ft. (12.1 m) | | 12AWG/3.31mm ² supply wire |
| 60W, 80W, 100W, 180W | 25W | Supply Wire Gauge | | | | | | | | | | | | | | |
| 20 ft. (6.1 m) | 120 ft. (36.6 m) | 18AWG/0.82mm ² supply wire - 9409 | | | | | | | | | | | | | | |
| 25 ft. (7.6 m) | | 16AWG/1.31mm ² supply wire | | | | | | | | | | | | | | |
| 35 ft. (10.6 m) | | 14AWG/2.08mm ² supply wire | | | | | | | | | | | | | | |
| 40 ft. (12.1 m) | | 12AWG/3.31mm ² supply wire | | | | | | | | | | | | | | |
| Operating Environment | -40 °C to + 60 °C | | | | | | | | | | | | | | | |
| Module Dimensions (h x w x l) | 0.37 x 0.72 x 2.27 in | | | | | | | | | | | | | | | |
| Sign Dimensions | For best results, recommended sign depth is 1.5 inches (38mm) or greater | | | | | | | | | | | | | | | |
| Warranty | GE offers a limited system warranty of up to five (5) years | | | | | | | | | | | | | | | |
| LED Module Certifications | UL Recognized #E219167, UL Classified #E229508, CE, RCM, RoHS, IP66 wet location rated | | | | | | | | | | | | | | | |



www.gelighting.com

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2015 GE.

SIGN099 (Rev 08/31/15)